



Omni-ID® IQ 400P

Omni-ID IQ 400P is a small footprint, premium synthetic RFID label product. Designed for the office environment the IQ 400P provides strong performance on plastic and non-metal assets in a small, easy to deploy label. Constructed from high specification polymer and adhesive materials IQ 400P is suitable for extended use and is resistant to scratching, peeling and UV degradation.


Applications

With its small size and premium materials, Omni-ID IQ 400P labels are ideally suited to IT and office asset management applications including attachment to:

- ▶ Plastic facia's on IT equipment.
- ▶ Office Furniture.
- ▶ Monitors and IT accessories.

Physical Specifications

Encasement	Premium Synthetic label on transparent PET liner
Size (mm) (tolerance)	46.5 x 12.4 x 0.3 +/- 0.5
Size (in) (tolerance)	1.83 x 0.49 x 0.01 +/-0.02
Weight (g)	0.15

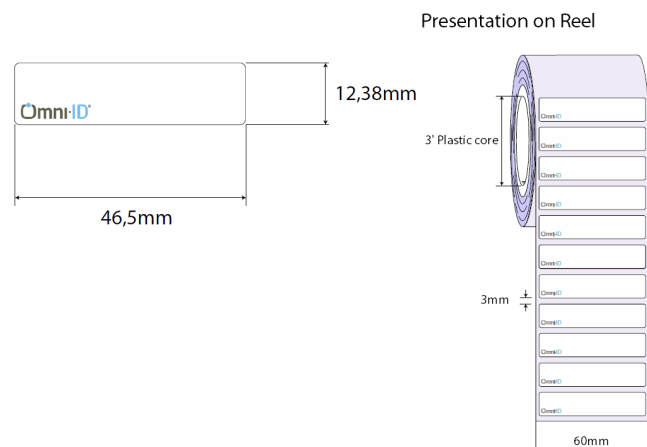


RF Specifications

Protocol	EPC Class 1 Gen2
Frequency Range (MHz)	860-960MHz (global)
Read Range (Fixed reader) ¹	Up to 5m (16.5ft)
Read Range (Handheld reader) ¹	Up to 2.5m (8.2ft)
Material Compatibility	Plastic and non-metallic substrates
IC Type (chip)	Alien H3
Antenna specification	ALN-9610
Memory ²	EPC - 96bits User - 512bits TID - 64bits

1. Quoted performance achieved using standard testing methodology. Read range will vary with reader hardware and output power.
2. EPC and User memory are reprogrammable, TID is locked at point of manufacture.

Radiation Patterns

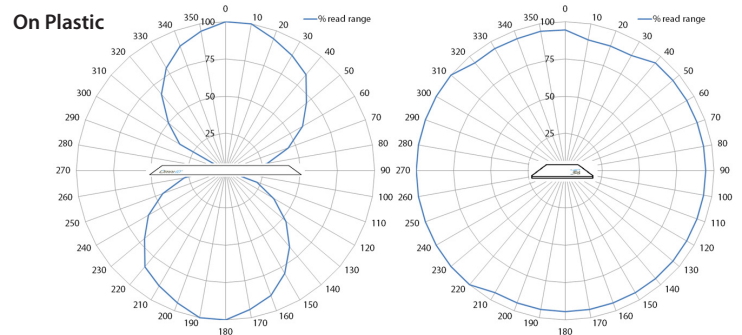

Related Products and Services

- ▶ **Omni-ID Prox NG** - Market leading, small form factor tag for mixed plastic and metal IT asset environments in global enterprises.
- ▶ **Omni-ID Prox label** - Small, consistent, product for mixed metal and plastic IT asset environments.
- ▶ **Omni-ID IQ 800P** - Large premium label for plastic assets.
- ▶ **Service Bureau** - Omni-ID offers a full service bureau for printing and pre-encoding Omni-ID tags at point of manufacture.



Environmental Specification

Operating Temperature	-40 to +85°C
Long term Max Temperature ¹ exposure - (days,weeks,years)	+85°C
Short term Max Temperature ¹ exposure - (minutes,hours)	+105°C
IP Rating	IP68
Shock and Vibration	MIL STD 810-F
Attachment	Premium film adhesive (standard)
Certifications	RoHS approved CE approved ATEX/IECEX certified (option) US&Canada (C1D1/D2) certified (option)
Warranty	1 year

1. Excludes adhesive options, consult adhesive data sheets for recommended temperature ratings.

Ordering Information

Order Numbers	055 – GS :304 (ATEX/IECEX certified) :307 (US&Canada (C1D1/D2) certified) :701 (Standard Service Bureau) :702 (Custom Service Bureau)
---------------	---

For more information, contact:

Omni-ID Corporate Headquarters:

1200 Ridgeway Ave
Rochester, NY 14615 USA

European Office:

The Enterprise Centre
Coxbridge Business Park
Alton Road, Farnham, Surrey
GU10 5EH, United Kingdom

Asia Office:

Process Export zone
East of Road No.4 and South of Road No.2
Chengyang District
Qingdao
266113, P.R. China

For product or technology inquiries:
Email customer.services@omni-id.com

