

Status: 09/2024



Label printers  
for printing with two colors

**XC Q**  
Made in Germany

## XC Q label printers for printing with two colors



### Highlights

- **300 dpi**, printable as wide as 105.7 mm or 162.6 mm
- **Heating** can be assigned separately to each print head.
- If **printing only with print head 2**, print head 1 is lifted by menu control.
- **Automated ribbon saving** is provided on print head 1. The print head is lifted and the ribbon is stopped during material feed. Opening or closing the print head may result in stress marks on wax ribbons.
- **Continuous print images** when cutting at no backfeed
- **Optimized printing**, so that multiple print jobs can be printed seamless
- **CSQ 402 cutters** are provided for XC Q4 printers, **CU600 cutters** for XC Q6.3.
- Find **documentation** on the Internet. DVDs are no longer part of delivery.



# Types of printers

1.1



## XC Q4 providing a tear-off plate

All materials wound on a roll can be printed.

| Label printer       |           | XC Q4 |
|---------------------|-----------|-------|
| Print resolution    | dpi       | 300   |
| Print speed         | mm/s max. | 150   |
| Print width         | mm max.   | 105.7 |
| Width of a material | mm max.   | 114   |

1.2



## XC Q4 providing a CSQ 402 cutter

Paper labels and self-adhesive labels, cardboard and synthetic materials can be cut.

| Label printer       |                         | XC Q4-C2 |
|---------------------|-------------------------|----------|
| Print resolution    | dpi                     | 300      |
| Print speed         | mm/s max.               | 150      |
| Print width         | mm max.                 | 105.7    |
| Width of a material | mm max.                 | 114      |
| Tray                | Materials as long as mm | 100      |

1.3



## XC Q6.3 providing a tear-off plate

All materials wound on a roll can be printed.

| Label printer       |           | XC Q6.3 |
|---------------------|-----------|---------|
| Print resolution    | dpi       | 300     |
| Print speed         | mm/s max. | 150     |
| Print width         | mm max.   | 162.6   |
| Width of a material | mm max.   | 180     |

# Technical data

● typical ■ standard □ option

| Label printer                                                          |                    |             | XC Q4                                                                                                                          | XC Q6.3         |
|------------------------------------------------------------------------|--------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Guidance of materials                                                  |                    |             | aligned to the left                                                                                                            |                 |
| Print method                                                           |                    |             | ●                                                                                                                              |                 |
| Print resolution                                                       |                    |             | 300                                                                                                                            | 300             |
| Print speed                                                            |                    |             | 150                                                                                                                            | 150             |
| Print width                                                            |                    |             | 105.7                                                                                                                          | 162.6           |
| Automated ribbon saving                                                |                    |             | ●                                                                                                                              | ●               |
| Material <sup>1)</sup>                                                 |                    |             |                                                                                                                                |                 |
| Paper, cardboard, synthetics PET, PE, PP, PI, PVC, PU, acrylate, Tyvec |                    |             | ●                                                                                                                              |                 |
| Textile tape                                                           |                    |             | ●                                                                                                                              | -               |
| Finishing                                                              | Roll               |             | ●                                                                                                                              |                 |
|                                                                        | Roll diameter      | mm max.     | 300                                                                                                                            |                 |
|                                                                        | Core diameter      | mm          | 76                                                                                                                             |                 |
|                                                                        | Winding            |             | outside or inside                                                                                                              |                 |
| Label                                                                  | Width              | mm          | 20 - 116                                                                                                                       | 46 - 176        |
|                                                                        | Height             | mm at least | 10                                                                                                                             |                 |
|                                                                        | Thickness          | mm max.     | 0.1                                                                                                                            |                 |
| Liner                                                                  | Width              | mm          | 24 - 120                                                                                                                       | 50 - 180        |
|                                                                        | Thickness          | mm          | 0.03 - 0.16                                                                                                                    |                 |
| Continuous                                                             | Width              | mm          | 24 - 120                                                                                                                       | 50 - 180        |
|                                                                        | Thickness          | mm          | 0.03 - 0.5                                                                                                                     |                 |
|                                                                        | Weight (cardboard) | g/m² max.   | 300                                                                                                                            |                 |
| Ribbon <sup>2)</sup>                                                   | Color side         |             | outside or inside                                                                                                              |                 |
|                                                                        | Roll diameter      | mm max.     | 80                                                                                                                             |                 |
|                                                                        | Core diameter      | mm          | 25.4                                                                                                                           |                 |
|                                                                        | Length             | m max.      | 450                                                                                                                            |                 |
|                                                                        | Width              | mm max.     | 114                                                                                                                            | 170             |
| Printer dimensions, weights                                            |                    |             |                                                                                                                                |                 |
| Width x Height x Depth                                                 |                    | mm          | 248 x 395 x 554                                                                                                                | 358 x 395 x 554 |
| Weight                                                                 |                    | kg          | 22                                                                                                                             | 24              |
| Label sensors, position indicators                                     |                    |             |                                                                                                                                |                 |
| Transmissive sensor                                                    |                    | detecting   | labels, punch marks, materials ending,<br>print marks on translucent materials                                                 |                 |
| Reflective sensor                                                      | from below or top  | detecting   | labels, materials ending,<br>print marks on non-translucent materials                                                          |                 |
| Sensor distance                                                        | to locating edge   | mm          | 5 - 60                                                                                                                         |                 |
| Material passage                                                       |                    | mm max.     | 2                                                                                                                              |                 |
| Electronics                                                            |                    |             |                                                                                                                                |                 |
| Processor, 32 bit clock rate                                           |                    | MHz         | 800                                                                                                                            |                 |
| RAM                                                                    |                    | MB          | 256                                                                                                                            |                 |
| IFFS                                                                   |                    | MB          | 50                                                                                                                             |                 |
| Port for plugging a SD memory card (SDHC, SDXC)                        |                    | GB max.     | 512                                                                                                                            |                 |
| Battery for indicating time and date, real-time clock                  |                    |             | ■                                                                                                                              |                 |
| Data kept in memory (e.g. serial numbers) when power turns off         |                    |             | ■                                                                                                                              |                 |
| Interfaces                                                             |                    |             |                                                                                                                                |                 |
| RS232-C 1,200 to 230,400 baud / 8 bit                                  |                    |             | ■                                                                                                                              |                 |
| USB 2.0 Hi-Speed device to plug a PC                                   |                    |             | ■                                                                                                                              |                 |
| Ethernet 10/100 Mbit/s                                                 |                    |             | LPD, RawIP printing, SOAP web service, OPC UA, WebDAV<br>DHCP, HTTP/HTTPS, FTP/FTPS, TIME, NTP, Zeroconf, SNMP, SMTP, VNC      |                 |
| 2 USB hosts on the control panel,<br>2 USB hosts on the back of a unit |                    |             | Service key, USB stick, USB WLAN stick, USB WLAN stick with a rod antenna<br>keyboard, barcode scanner, external control panel |                 |
| USB host, 24 VDC, for peripheral plugging                              |                    |             | ■                                                                                                                              |                 |
| Digital I/O interface providing 8 inputs and 8 outputs                 |                    |             | □                                                                                                                              |                 |

<sup>1)</sup> Specifications are standards. Operations including small, slim, thick or stiff materials need testing, so do strongly adhesive labels.

<sup>2)</sup> A ribbon should be at least as wide as the liner material.

# Technical data

■ standard □ option

| Operating data                               |                                                                                                                                                                                                            |                                                                                                                                                            |              |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Voltage                                      |                                                                                                                                                                                                            | 100-240 VAC, 50/60 Hz, PFC                                                                                                                                 |              |
| Consumption of power                         |                                                                                                                                                                                                            | <10 W in standby / 100 W in typical operation / max. 200W                                                                                                  |              |
| Temperature / humidity                       | Operation                                                                                                                                                                                                  | +5 - 40°C / 10 - 85 %, not condensing                                                                                                                      |              |
|                                              | Stock                                                                                                                                                                                                      | 0 - 60°C / 20 - 85 %, not condensing                                                                                                                       |              |
|                                              | Transport                                                                                                                                                                                                  | -25 - 60°C / 20 - 85 %, not condensing                                                                                                                     |              |
| Approvals                                    |                                                                                                                                                                                                            | CE, UKCA, FCC Class A, ICES-3, cULus, CB, CCC, BSMI, Mexico Reg.                                                                                           |              |
| in preparation                               |                                                                                                                                                                                                            | BIS, KC-Mark                                                                                                                                               |              |
| Control panel                                |                                                                                                                                                                                                            |                                                                                                                                                            |              |
| Color LCD touchscreen                        |                                                                                                                                                                                                            | Diagonal                                                                                                                                                   | " 4.3        |
|                                              |                                                                                                                                                                                                            | Resolution Width x Height                                                                                                                                  | px 272 x 480 |
| Setup options                                |                                                                                                                                                                                                            |                                                                                                                                                            |              |
|                                              | Print Labels<br>Ribbon<br>Tear off<br>Cut<br>Interfaces<br>Error                                                                                                                                           | Region:<br>- Language<br>- Country<br>- Keyboard<br>- Time zone<br>Time<br>Display:<br>- Brightness<br>- Power saving mode<br>- Orientation<br>Interpreter |              |
| Status bar                                   |                                                                                                                                                                                                            |                                                                                                                                                            |              |
|                                              | Receive data<br>Record datastream<br>Warning to a ribbon ending<br>SD memory card plugged<br>USB stick plugged                                                                                             | WLAN<br>Ethernet<br>USB Slave<br>Time                                                                                                                      |              |
| Controls                                     |                                                                                                                                                                                                            |                                                                                                                                                            |              |
|                                              | Ribbon 1/2<br>- Winding<br>- Prior warning<br>- End of ribbon<br>Running out of material                                                                                                                   | Print head 1/2<br>- Voltage<br>- Temperature<br>- open<br>Peripheral error                                                                                 |              |
| Test routines                                |                                                                                                                                                                                                            |                                                                                                                                                            |              |
| System diagnostics                           | upon startup, detection of print head included                                                                                                                                                             |                                                                                                                                                            |              |
| Information display, test printout, analysis | Status printout                                                                                                                                                                                            | Test grid                                                                                                                                                  |              |
|                                              | Fonts list                                                                                                                                                                                                 | Label profile                                                                                                                                              |              |
|                                              | List of units                                                                                                                                                                                              | List of events                                                                                                                                             |              |
|                                              | WLAN status                                                                                                                                                                                                | Monitor mode                                                                                                                                               |              |
| Status reports                               | - Printout of print durations, running hours, etc.<br>- Status of a unit requested by software command<br>- Display of errors related to a network, barcode or peripheral device, as well as links missing |                                                                                                                                                            |              |
| Fonts                                        |                                                                                                                                                                                                            |                                                                                                                                                            |              |
| Integral                                     | 5 bitmap fonts:<br>12 x 12 dots<br>16 x 16 dots<br>16 x 32 dots<br>OCR-A<br>OCR-B                                                                                                                          | 7 vector fonts:<br>AR Heiti Medium GB-Mono<br>CG Triumvirate Condensed Bold<br>Garuda<br>HanWangHeiLight<br>Monospace 821<br>Swiss 721<br>Swiss 721 Bold   |              |
| For storing                                  | TrueType fonts                                                                                                                                                                                             |                                                                                                                                                            |              |
| Sets of characters                           | Windows-1250 to -1257<br>DOS 437, 737, 775, 850, 852, 857, 862, 864, 866, 869<br>EBCDIC 500<br>ISO 8859-1 to -10 and -13 to -16<br>WinOEM 720<br>UTF-8<br>MacRoman<br>DEC MCS<br>KOI8-R                    |                                                                                                                                                            |              |
|                                              | Western European<br>Eastern European<br>Chinese, simplified<br>Chinese, traditional<br>Thai                                                                                                                | Cyrillic<br>Greek<br>Latin<br>Hebrew<br>Arabian                                                                                                            |              |

| Fonts                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                              |                  |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Bitmap                                           | 1 mm to 3 mm wide and high<br>Zoom factors 2 to 10<br>0°, 90°, 180°, 270° orientations                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                              |                  |
| Vector / TrueType                                | 0.9 mm to 128 mm wide and high<br>Continuous zoom<br>360° orientation in steps of 1°                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                              |                  |
| Styles                                           | bold, italic, underlined, outline, inverse<br>- depending on the font type                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                              |                  |
| Character spacing                                | proportional or monospace                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                              |                  |
| Graphics                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                              |                  |
| Elements                                         | lines, arrows, rectangles, circles, ellipses<br>- filled or gradient                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                              |                  |
| Formats                                          | PCX, IMG, BMP, TIF, MAC, GIF, PNG                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                              |                  |
| Codes                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                              |                  |
| 1D barcodes (linear)                             | Code 39, Code 93<br>Code 39 Full ASCII<br>Code 128 A, B, C<br>EAN 8, 13<br>EAN/UCC 128/GS1-128<br>EAN/UPC Appendix 2<br>EAN/UPC Appendix 5<br>FIM<br>HIBC                                                                                                                                                                                                                                                                                                                                   | Interleaved 2/5<br>Ident and routing code<br>of Deutsche Post<br>Codabar<br>JAN 8, 13<br>MSI<br>Plessey<br>Postnet<br>RSS 14<br>UPC A, E, E0 |                  |
| 2D code,<br>stacked codes                        | DataMatrix<br>DataMatrix Rectangle Extension<br>QR-Code<br>Micro QR-Code<br>GS1 QR-Code<br>GS1 DataMatrix<br>PDF 417<br>Micro PDF 417<br>UPS Maxicode<br>GS1 DataBar<br>Aztec<br>Codablock F<br>Dotcode<br>RSS 14 truncated, limited, stacked,<br>stacked omni-directional<br><br>All codes may vary in height, modular width and ratio.<br>0°, 90°, 180°, 270° orientations<br><br>Feasibility of check digits, plain text printouts<br>and start/stop coding depends on the type of code. |                                                                                                                                              |                  |
| Software                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                              |                  |
| Label software                                   | cablabel S3 Lite<br>cablabel S3 Viewer<br>cablabel S3 Pro<br>cablabel S3 Print                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                              | ■<br>■<br>□<br>□ |
| Running also with                                | CODESOFT<br>Loftware Spectrum<br>NiceLabel<br>BarTender                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                              |                  |
| Stand-alone operation                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                              | ■                |
| Windows<br>printer drivers<br>certified WHQL for | Windows 10<br>Windows 11                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Server 2016<br>Server 2019<br>Server 2022                                                                                                    | ■                |
| Apple printer drivers                            | Mac OS X 10.6 or any later release                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                              | ■                |
| Linux printer drivers                            | CUPS 1.2 or any later release                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                              | ■                |
| Programming                                      | JScript printer language<br>abc Basic Compiler<br>ZPL II (datastream be tested in advance)                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                              | ■<br>■<br>□      |
| Integration                                      | SAP<br>Database Connector                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                              | ■<br>■           |
| Administration                                   | Printer control<br>Configuration on the Intranet and Internet                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                              | ■<br>■           |


Free and Open Source software in cab products:  
[www.cab.de/opensource](http://www.cab.de/opensource)



# cablabel S3 software

## Design, print, administrate


cablabel S3 opens up the full potential of cab devices. Defining a label is first. Modular design adapts cablabel S3 to requirements step by step. Plug-ins are embedded. Native JScript programming, for example, is supported by the JScript Viewer. The designer user interface and JScript codes synchronize in real time. Optional features can be integrated, such as the Database Connector or barcode verifiers.

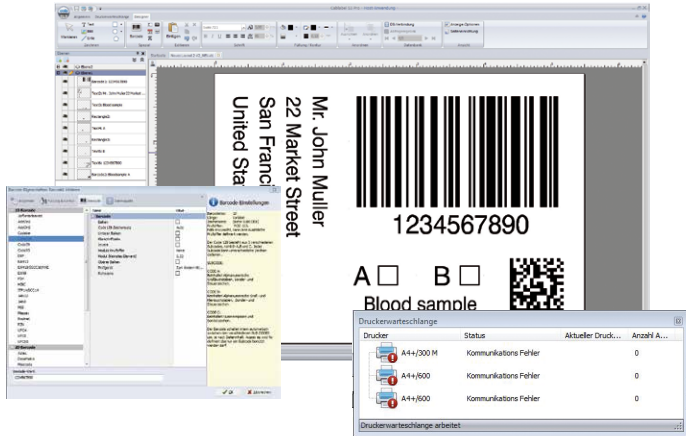

See further information on  
[www.cab.de/en/cablabel](http://www.cab.de/en/cablabel)

## Stand-alone operation

This operating mode enables a printer select and print labels while not connected to a host system. Labels can be designed using software such as cablabel S3 or a text editor on a PC. Label formats, texts, graphics and data of a database can be stored on a memory card, a USB stick or a printer's IFFS memory. Only variable data are sent by a keyboard, a barcode scanner, a scale or any other host system to a printer, or be recalled by the Database Connector from a host and printed.

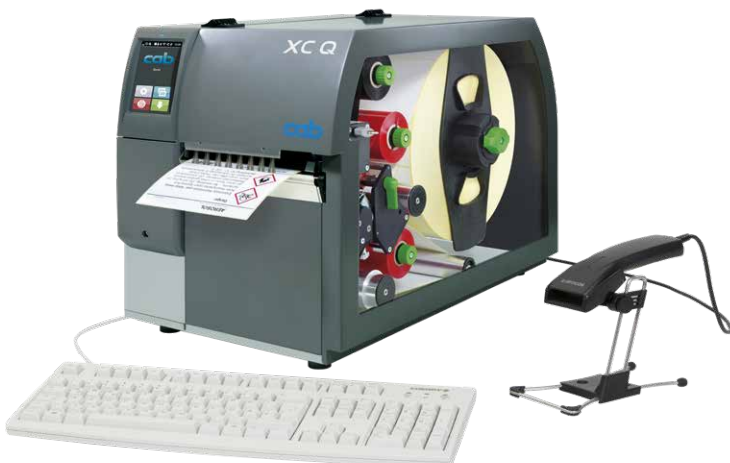

# Printer control

## Drivers



cab provides drivers to control a printer with software other than cablabel S3.



Free download on [www.cab.de/en/support](http://www.cab.de/en/support)



## Programming

### JScript

cab printers embed JScript language. Download free manual on [www.cab.de/en/programming](http://www.cab.de/en/programming)



### abc Basic Compiler

Integral to the firmware, abc in addition to JScript enables advanced programming before data are edited for printout. For example, external printer languages can be replaced without intervening in a print job in progress. Data may be imported as well from other systems such as scales, barcode scanners or PLC.

## Integration



### Printer Vendor program

cab as a member of this program developed a replace method for controlling cab printers from SAP<sup>1)</sup> R/3 using SAPScript. Only variable data are sent by a host system to a printer. They add on the printer to local images and fonts (IFFS, memory card, etc.).

## Database Connector



Printers in a network may access data from a ODBC / OLEDB database and print it on labels. Data can be rewritten to a database while print jobs are in progress.

# Printer administration

## Configuration on the Intranet und Internet



Integral HTTP / FTP servers enable a printer be controlled or configured, firmware be updated and memory cards be administrated using standard applications such as a web browser or a FTP client. Administrators and operators on behalf of SNMP / SMTP are notified of states, alerts and errors by email or SNMP datagrams. Time and date are synchronized by a time server.

## OPC UA



All the latest cab printers have been designed ready for interacting with machines and components of different manufacturers in industrial plants. An OPC UA server is part of the firmware.

See further information on [www.cab.de/en/opcua](http://www.cab.de/en/opcua)


<sup>1)</sup> SAP and associated logos are trademarks or registered trademarks of SAP SE.

## Accessories / optional equipment

|     |                                                                                   |                                                                                                                                                                |
|-----|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2.1 |  | <b>SD memory card</b>                                                                                                                                          |
| 2.2 |  | <b>USB stick</b>                                                                                                                                               |
| 2.3 |  | <b>USB WLAN stick</b><br>2.4 GHz 802.11b/g/n<br>Hotspot mode or infrastructure mode                                                                            |
| 2.4 |  | <b>USB WLAN stick with a rod antenna</b><br>for extended range of operation<br>2.4 GHz 802.11b/g/n + 5 GHz 802.11a/n/ac<br>Hotspot mode or infrastructure mode |
| 2.6 |  | <b>I/O interface plug</b><br>SUB-D, 25 pins, for connecting<br>all control signals to the I/O interface                                                        |

|     |                                                                                    |                                                                                                                                                                                           |
|-----|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2.7 |   | <b>Digital I/O interface</b><br>Labeling is triggered via a PLC, a sensor or a hand switch. Status reports and errors are displayed simultaneously.                                       |
| 2.8 |  | <b>Fanfold guide for XC Q4 and XC Q6.3</b><br>Fanfold labels are inserted behind the print head. A guide in addition to a brake enable the labels be fed reliably to the print mechanics. |

## Cutting, rewinding

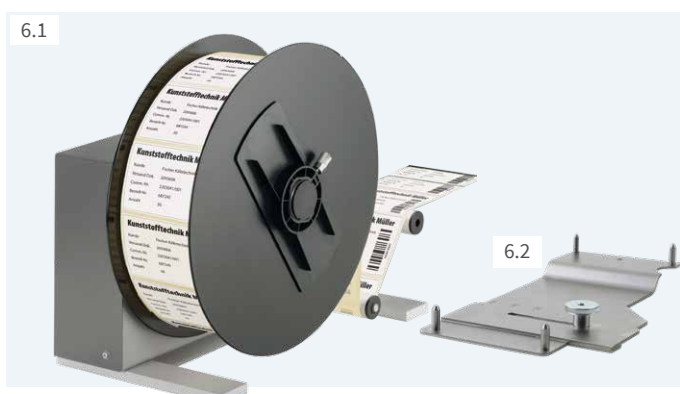

### Cutters

Paper, cardboard, textile and synthetic materials can be cut.

A CSQ can be pivoted to simplify material changeover.

A tray allows collecting a maximum of 50 labels.

Label heights can be adjusted.

A CU400 is still recommended with textile operations.

| Cutter                                                         | CSQ 402                  | CU400 | CU600   |
|----------------------------------------------------------------|--------------------------|-------|---------|
| Operated with                                                  | XC Q4                    | XC Q4 | XC Q6.3 |
| Material:                                                      |                          |       |         |
| Width mm max.                                                  | 120                      | 120   | 180     |
| Passage height mm max.                                         | 2.0                      | 2.0   | 2.0     |
| Weight (cardboard) gr/m <sup>2</sup> max.                      | 300                      | 300   | 300     |
| Thickness mm max.                                              | 1.1                      | 1.1   | 1.1     |
| Cutting length mm at least                                     | 10                       | 5     | 5       |
| Tray Materials as wide as mm                                   | 100                      | 100   | -       |
| Performance cuts/min at use of material 1 mm high, no backfeed | 200                      | 100   | 100     |
| Controls                                                       | no final cutter position |       |         |
|                                                                | cutter cover removed     | -     | -       |

### External ER4, ER6 rewinders, power supply built in

Label webs may be wound outside or inside. They are wound consistently and tight by electronic control, with a pendulum arm.

| External rewriter           | ER4/300                                                                                                | ER6/300                  |
|-----------------------------|--------------------------------------------------------------------------------------------------------|--------------------------|
| Operated with               | XC Q4                                                                                                  | XC Q6.3                  |
| Width of a material mm max. | 120                                                                                                    | 180                      |
| Roll diameter mm max.       | 300                                                                                                    |                          |
| Core diameter mm            | 40 if a winder axle or a cardboard core are in use<br>76 if a cardboard core is in use with an adapter |                          |
| Winding                     | outside or inside                                                                                      |                          |
| Adapter kit                 | <input type="checkbox"/>                                                                               | <input type="checkbox"/> |

# Delivery program

## Label printers

| Pos. |                                                                                   | Item no. | Designation                                  |
|------|-----------------------------------------------------------------------------------|----------|----------------------------------------------|
| 1.1  |  | 6011520  | XC Q4 label printer                          |
| 1.2  |                                                                                   | 6011522  | XC Q4-C2 label printer with a CSQ 402 cutter |
| 1.3  |  | 6011525  | XC Q6.3 label printer                        |

xxxxxxx.250 options assembled

## Wear parts

| Pos. |                                                                                   | Item no.                   | Designation                                |
|------|-----------------------------------------------------------------------------------|----------------------------|--------------------------------------------|
|      |  | 5987089.001<br>5987097.001 | Print head 4/300 X<br>Print head 6.3/300 X |
|      |  | 5954180.001<br>5954245.001 | DR4 print roller<br>DR6 print roller       |

## Scope of delivery

Label printer  
Type E+F power cable, 1.8 m  
Connecting USB cable, 1.8 m  
Instructions DE / EN

## Provided online



<https://setup.cab.de/en>

Instructions  
Configuration manuals DE / EN / FR  
Service manuals DE / EN  
Spare parts lists DE / EN  
Programming manual EN  
Windows printer drivers certified WHQL for  
Windows 10 Server 2016  
Windows 11 Server 2019  
Server 2022  
Apple Mac OS X printer drivers DE / EN / FR  
Linux printer drivers DE / EN / FR  
cablabel S3 Lite software  
cablabel S3 Viewer  
Database Connector

## Accessories / optional equipment

| Pos. |                                                                                     | Item no.           | Designation                                                                |
|------|-------------------------------------------------------------------------------------|--------------------|----------------------------------------------------------------------------|
| 2.1  |    | 5977370            | SD memory card                                                             |
| 2.2  |    | 5977730            | USB stick                                                                  |
| 2.3  |    | 5978912            | USB WLAN stick<br>2.4 GHz 802.11b/g/n                                      |
| 2.4  |    | 5977731            | USB WLAN stick with a rod antenna<br>2.4 GHz 802.11b/g/n +<br>5 GHz a/n/ac |
| 2.6  |    | 5917651.xxx        | I/O interface plug<br>SUB-D, 25 pins                                       |
| 2.7  |    | 5551447.xxx        | Digital I/O interface                                                      |
| 2.8  |    | 6011930.xxx        | Fanfold guide XC Q                                                         |
| 5.1  |    | 5978900<br>5979033 | CU400 cutter<br>tray provided<br>CU600 cutter                              |
| 6.1  |  | 5946090<br>5946420 | External ER4/300 rewinder<br>External ER6/300 rewinder                     |
| 6.2  |  | 6011796<br>6011797 | XC Q4 adapter kit<br>XC Q6.3 adapter kit                                   |
| 3.1  |  | 5984565.xxx        | CSQ 402 cutter                                                             |

xxx - .250 assembled to a printer  
.001 separate delivery  
resp. spare part

## Accessories

Accessorial products are plugged  
or screwed to a printer by a customer.



See further accessories on  
[www.cab.de/en/xcq-accessories](http://www.cab.de/en/xcq-accessories)

## Optional equipment

Options are parts or units to perform special functions.  
They are assembled to a printer in addition to or instead of standards.  
If order implies options be assembled ex factory,  
corresponding item numbers are added by .250.  
Options delivered separately are added by .001.



# Delivery program

## Label software

| Pos.  | Item no.       | Designation                                 |
|-------|----------------|---------------------------------------------|
| 11.7  | Bundle         | cablabel S3 Lite<br>(download on cab.de/en) |
|       | 5588001        | cablabel S3 Pro 1 WS                        |
|       | 5588100        | cablabel S3 Pro 5 WS                        |
|       | 5588101        | cablabel S3 Pro 10 WS                       |
|       | 5588150        | cablabel S3 Pro 1 additional licence        |
|       | 5588151        | cablabel S3 Pro 4 additional licences       |
|       | 5588152        | cablabel S3 Pro 9 additional licences       |
|       | 5588002        | cablabel S3 Print 1 WS                      |
|       | 5588105        | cablabel S3 Print 5 WS                      |
|       | 5588106        | cablabel S3 Print 10 WS                     |
|       | 5588155        | cablabel S3 Print 1 additional licence      |
|       | 5588156        | cablabel S3 Print 4 additional licences     |
|       | 5588157        | cablabel S3 Print 9 additional licences     |
|       | in preparation | cablabel S3 Print Server                    |
| 11.10 | 9008486        | Programming manual EN,<br>printed copy      |

Scopes of delivery, designs and technical data correspond to the date of this publication. They are subject to change. Catalog data do not represent any warranty or guarantee.

## User languages

| Language               | Instructions | Control panel | Windows driver | Service manual | cablabel S3 |
|------------------------|--------------|---------------|----------------|----------------|-------------|
| <b>European Union</b>  |              |               |                |                |             |
| Bulgarian              | X            | X             | X              |                | X           |
| Danish                 | X            | X             | X              |                |             |
| German                 | X            | X             | X              | X              | X           |
| Estonian               | X            | X             | X              |                |             |
| Finnish                | X            | X             | X              |                |             |
| French                 | X            | X             | X              |                | X           |
| Greek                  | X            | X             | X              |                |             |
| English                | X            | X             | X              | X              | X           |
| Italian                | X            | X             | X              |                | X           |
| Croatian               | X            | X             | X              |                | X           |
| Latvian                | X            | X             | X              |                |             |
| Lithuanian             | X            | X             | X              |                |             |
| Dutch                  | X            | X             | X              |                |             |
| Polish                 | X            | X             | X              |                | X           |
| Portuguese             | X            | X             | X              |                |             |
| Romanian               | X            | X             | X              |                |             |
| Swedish                | X            | X             | X              |                |             |
| Slovak                 | X            | X             | X              |                |             |
| Slovenian              | X            | X             | X              |                |             |
| Spanish                | X            | X             | X              |                | X           |
| Czech                  | X            | X             | X              |                | X           |
| Hungarian              | X            | X             | X              |                |             |
| <b>Europe (Non-EU)</b> |              |               |                |                |             |
| Macedonian             | X            | X             | X              |                |             |
| Norwegian              | X            | X             | X              |                |             |
| Russian                | X            | X             | X              |                | X           |
| Serbian                | X            | X             | X              |                |             |
| Turkish                | X            | X             | X              |                |             |
| <b>Asia</b>            |              |               |                |                |             |
| Chinese (simplified)   | X            | X             | X              |                | X           |
| Chinese (traditional)  | X            | X             | X              |                | X           |
| Japanese               | X            |               | X              |                |             |
| Korean                 | X            |               | X              |                | X           |
| Thai                   | X            | X             | X              |                |             |
| <b>Middle East</b>     |              |               |                |                |             |
| Persian                |              | X             |                |                |             |
| Arabic                 |              | X             |                |                |             |

# Overview of cab products

Label printers  
**MACH1, MACH2**



Label printers  
**EOS 2**



Label printers  
**EOS 5**



Label printers  
**MACH 4S**



Label printers  
**SQUIX 2**



Label printers  
**SQUIX 4**



Label printers  
**SQUIX 6.3**



Label printers  
**SQUIX 8.3**



Label printers  
**XD Q double-sided**




Label printers  
**XC two-colored**



Print and apply systems  
**HERMES Q**



Print and apply systems  
**Hermes C two-colored**



Tube labeling systems  
**AXON 1**



Print modules  
**PX Q**



Labels and ribbons



Label software  
**cablabel S3**



Label dispensers  
**HS, VS**



Labeling heads  
**IXOR**



Marking lasers  
**XENO 4**



Laser marking systems



Germany  
**cab Produkttechnik GmbH & Co KG**  
Karlsruhe  
Phone +49 721 6626 0  
[www.cab.de](http://www.cab.de)

France  
**cab Technologies S.à.r.l.**  
Niedermörsen  
Phone +33 388 722501  
[www.cab.de/fr](http://www.cab.de/fr)

USA  
**cab Technology, Inc.**  
Chelmsford, MA  
Phone +1 978 250 8321  
[www.cab.de/us](http://www.cab.de/us)

Mexico  
**cab Technology, Inc.**  
Juárez  
Phone +52 656 682 4301  
[www.cab.de/es](http://www.cab.de/es)

Taiwan  
**cab Technology Co., Ltd.**  
Taipei  
Phone +886 (02) 8227 3966  
[www.cab.de/tw](http://www.cab.de/tw)

China  
**cab (Shanghai) Trading Co., Ltd.**  
Shanghai  
Phone +86 (021) 6236 3161  
[www.cab.de/cn](http://www.cab.de/cn)

Singapore  
**cab Singapore Pte. Ltd.**  
Singapore  
Phone +65 6931 9099  
[www.cab.de/en](http://www.cab.de/en)

South Africa  
**cab Technology (Pty) Ltd.**  
Randburg  
Phone +27 11 886 3580  
[www.cab.de/za](http://www.cab.de/za)

**cab // 820** distribution and service partners in more than **80** countries